

RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMC0000400	CV74EG	Glassceramic Ranges

ITEM

2 ceramic hotplate electric boiling top on open stand



The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice.



MI - 70	MAMC0000400	CV74EG	Glassceramic Ranges
RANGE	CODE	MODEL	FUNCTION

ITEM

2 ceramic hotplate electric boiling top on open stand



TECHNICAL SPECIFICATIONS

WIDTH (mm):	400
DEPTH (mm):	750
HEIGHT (mm):	900
WEIGHT (Kg):	53
VOLUME (m ³):	0.4
EL. POWER (kW):	5
VOLTAGE:	VAC400-3N / VAC230-3
INTERNAL BASE UNIT DIM. (mm):	360x400(h)x700 mm
COOKING ZONES N°:	2
COOKING ZONES DIM. (mm):	2x Ø 250mm
COOKING ZONE DETAILS:	2 x 2,5 kW
IP GRADE:	IPX5

DESCRIPTION

Freestanding glass ceramic electric boiling top, on open cabinet base, in AISI 3O4 stainless steel. 2O/IO pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. 6 mm thick glass ceramic cooking surface hermetically sealed to the top and designed to create 2 independent cooking zones, each with underlying 2.5 kW Ø 25O mm radiant elements to reach maximum temperature of 4OO°C in 3 min. Glass dimensions 346x57I mm. The cooking zones are marked by screen printed circles on the glass-ceramic surface and equipped with residual heat indicators. Energy regulator for heat control with shape designed to prevent water infiltration, with integral indicator lights for instant recognition of appliance operation. Hotplates equipped with automatic reset safety thermostat that trips if the appliance is switched on with an unsuitable pan or no pan at all. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.




The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice.



MI - 70	MAMC0000400	CV74EG	Glassceramic Ranges
RANGE	CODE	MODEL	FUNCTION

ITEM

2 ceramic hotplate electric boiling top on open stand

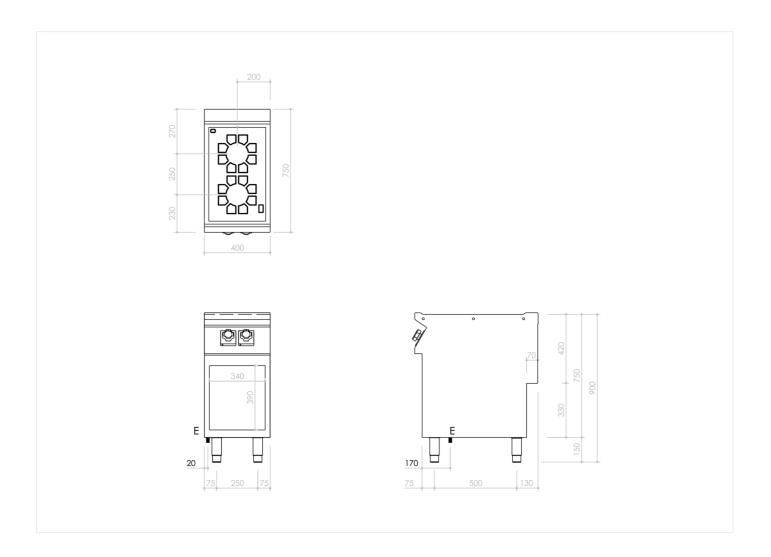

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:

VAC400-3N/VAC230-3 50/60Hz



The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice. LAST UPDATE: 16/1/2025