

RANGE CODE MODEL FUNCTION

Complementary refrigerated units MACROOO961 MVR2I38SV Refrigerated Displays

ITEM

Refrigerated display 2100 mm without glass







RANGE CODE MODEL FUNCTION

Complementary refrigerated units MACROOO961 MVR2I38SV Refrigerated Displays

ITEM

Refrigerated display 2100 mm without glass



TECHNICAL SPECIFICATIONS

| RANGE: | | O° +15°C |
|---------------------------|------|-----------------|
| WIDTH (mm): | | 2150 |
| DEPTH (mm): | | 380 |
| HEIGHT (mm): | | 225 |
| WEIGHT (Kg): | | 89 |
| VOLUME (m ³): | | 0.39 |
| EL. POWER (kW): | | 0.22 |
| VOLTAGE: | | VAC23O |
| FREQUENCY (Hz): | | 5OHz |
| INTERNAL DIM. (mm): | | 17O8x3O5x15O(h) |
| EXTERNAL MATERIAL: | | 304 |
| INTERNAL MATERIAL: | | 304 |
| GROSS CAPACITY (L): | | 78 |
| OPERATING MODE: | | Static |
| REFRIGERANT POWER: | | 25O |
| GAS TYPE: | R29O | |
| REFRIGERANT QUANTITY: | | IIO |
| CLIMATE CLASS: | | 32°C |

DESCRIPTION

This equipment does not only complete the functionality of a pizza counter, but can also be used independently, on preparation tables, by means of feet, wall fixing brackets or backs. Available depths are 32 cm and 38 cm. The range consists of glassless, flat-glass or curved-glass models and comes with different stainless steel or polycarbonate GN container combinations. The container is in stainless steel, while the external finish is satin-finish scotchbrite. The units come with high-density polyurethane insulation (40 kg/mc).



RANGE

CODE

MODEL

FUNCTION


Complementary refrigerated units

MACROOO961 MVR2I38SV

Refrigerated Displays

ITEM

Refrigerated display 2100 mm without glass

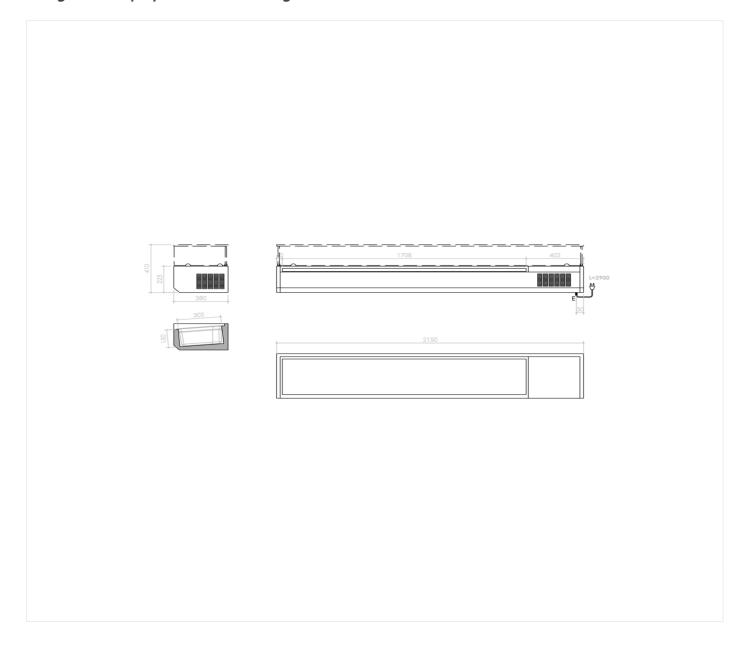

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:

VAC23O 5OHz

