

RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOOOO830	FT74GRG#	Griddles - Mild Steel Plate

ITEM

Gas griddle top with ribbed plate on open stand



RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOOOO830	FT74GRG#	Griddles - Mild Steel Plate

ITEM

Gas griddle top with ribbed plate on open stand



TECHNICAL SPECIFICATIONS

WIDTH (mm):	400
DEPTH (mm):	750
HEIGHT (mm):	900
WEIGHT (Kg):	65
VOLUME (m ³):	0.4
GAS POWER (kW):	6
INTERNAL BASE UNIT DIM. (mm):	360x400(h)x700 mm
COOKING ZONES N°:	1
COOKING ZONES DIM. (mm):	335x530 mm
COOKING ZONE DETAILS:	1x 6 kW
PRODUCT SPECIFICATIONS:	Ribbed Mild Steel Plate
TEMP. RANGE (°C):	0-280 °C

DESCRIPTION


Freestanding electric griddle on open cabinet base, in AISI 304 stainless steel. 20/10 pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. Cooking surface with sloping ribbed hotplate. Hotplate recessed 40 mm compared to worktop, fully welded construction for guaranteed ease of cleaning. Cooking surface with 65 mm cold zone at front of hotplate. Round Ø 40 mm drain hole for fat. Grease collection tub with 1.5 litre capacity. Heating by means of steel stabilised flame burner having 2 branches and 4 rows of flames for each zone, complete with pilot flame and safety thermocouple. Heating control knob shaped to prevent water infiltration. Gas supply controlled by thermostatic valve with safety thermocouple. Cooking temperature manually controlled from 90°C to 280°C. Automatic ignition by means of piezoelectric device with waterproof cap. Cooking surface 335x530 mm. Scraper supplied for smooth hotplate. Appliance equipped with stainless steel adjustable feet.



RANGE	CODE	MODEL	FUNCTION
MI - 70	MAMCOOOO830	FT74GRG#	Griddles - Mild Steel Plate

ITEM

Gas griddle top with ribbed plate on open stand

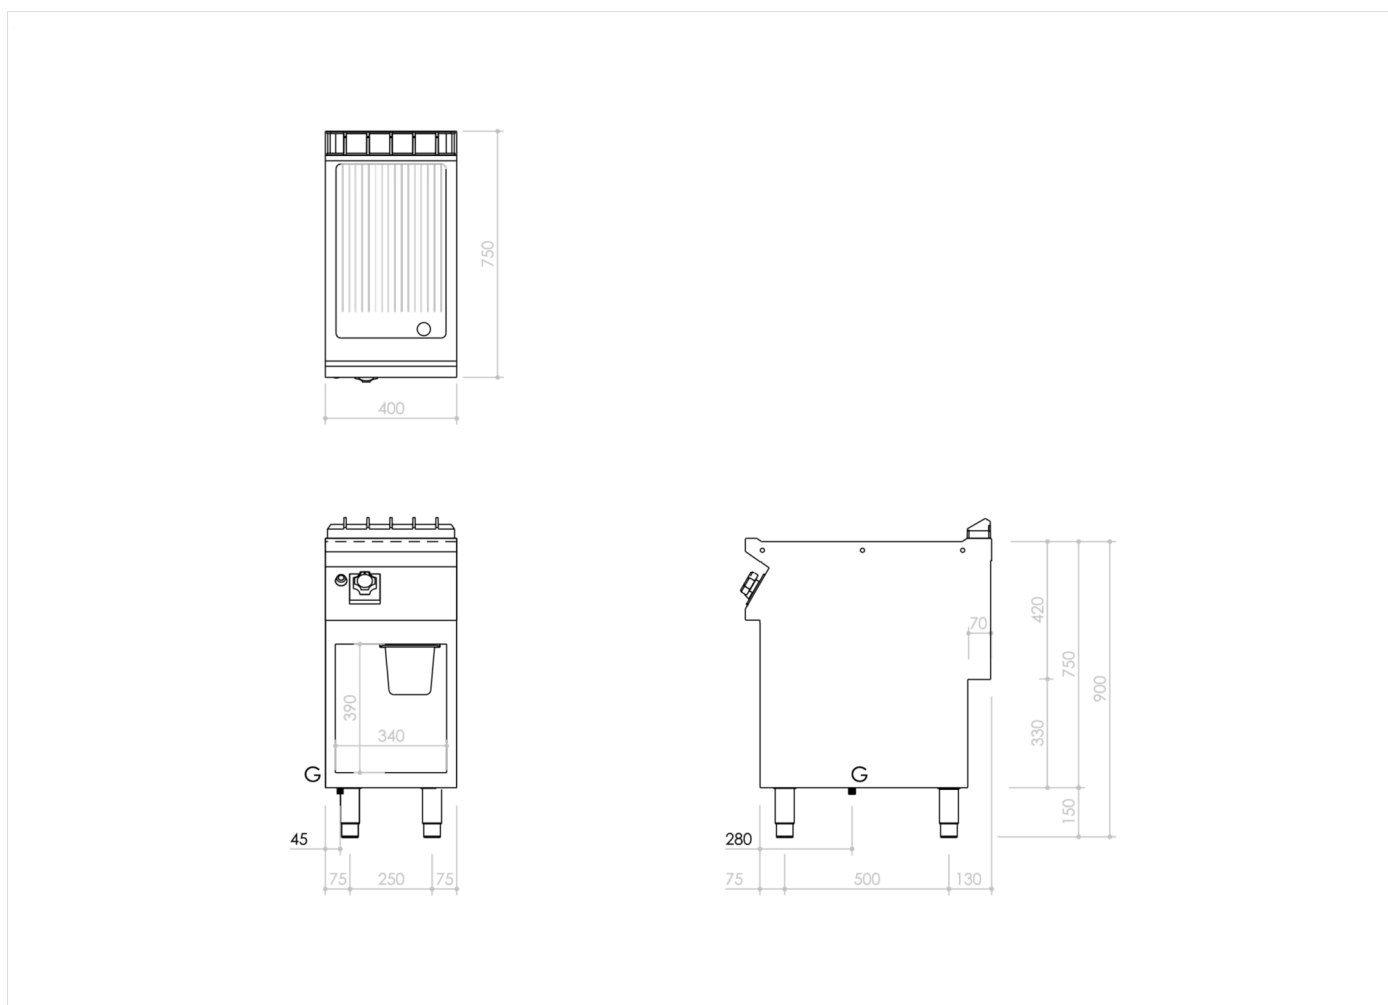

INSTALLATION SPECIFICATIONS

(G) Gas Inlet: $\text{Ø}1/2''$

