

| RANGE   | CODE        | MODEL | FUNCTION      |
|---------|-------------|-------|---------------|
| MI - 90 | MAMCOOO4960 | CP98E | Pasta Cookers |

ITEM

Double well electric pasta cooker, 42+42 litre water capacity



The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice.



| RANGE   | CODE        | MODEL | FUNCTION      |
|---------|-------------|-------|---------------|
| MI - 90 | MAMC0004960 | CP98E | Pasta Cookers |

ITEM

Double well electric pasta cooker, 42+42 litre water capacity



## **TECHNICAL SPECIFICATIONS**

| WIDTH (mm):               |        | 800              |        |
|---------------------------|--------|------------------|--------|
| DEPTH (mm):               |        | 920              |        |
| HEIGHT (mm):              |        | 900              |        |
| WEIGHT (Kg):              |        | 70               |        |
| VOLUME (m <sup>3</sup> ): |        | 1                |        |
| EL. POWER (kW):           |        | 17               |        |
| VOLTAGE:                  |        | VAC400-3N        |        |
| COOKING ZONES N           | :      | 2                |        |
| COOKING ZONE DE           | TAILS: | 2x 8.50kW        |        |
| TANK DIM. (mm):           |        | 3O5x51Ox285(h)mm |        |
| TANK N°:                  | 2      | CAPACITY (L):    | 2x 42L |
| IP GRADE:                 |        | IPX5             |        |
| TEMP. RANGE (°C):         |        | 0-100            |        |
|                           |        |                  |        |

## DESCRIPTION

Freestanding electric pasta cooker in AISI 3O4 stainless steel. 20/IO pressed steel top with anti-spill front edge and tank perimeter well with wide expansion zone for foam. Top designed for flush alignment with hermetic seal supplied. Deep drawn tank in AISI 3I6 polished stainless steel with radiused bottom for ease of cleaning. Water filling via ball valve with fine flow rate adjustment. Water tap located in zone protected against accidental impact. Heating with armoured immersion-type heating elements for optimised performance, foldable to facilitate tank cleaning. Heat control knob shaped to prevent water infiltration, equipped with integral indicator lights for instant recognition of heating and correct operation of the appliance. Heating control by means of energy regulator for more effective boiling control and energy saving in the stand-by position. Tank capacity 42+42 litres. Tank dimensions: 305x5IOx285h mm. Water drainage by means of accessible tap located in lower cabinet. Safety guaranteed by pressure switch that prevents heating if tank is empty. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.




The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice.



| MI - 90 | MAMC0004960 | CP98E | Pasta Cookers |
|---------|-------------|-------|---------------|
| RANGE   | CODE        | MODEL | FUNCTION      |

ITEM

Double well electric pasta cooker, 42+42 litre water capacity

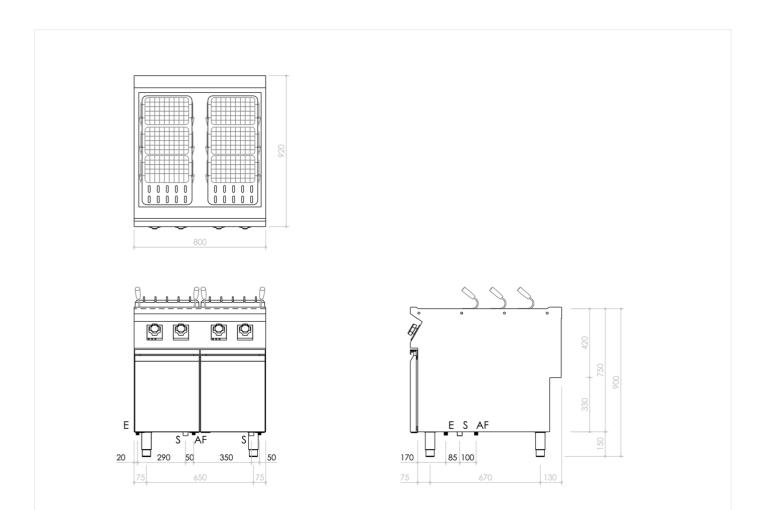

## INSTALLATION SPECIFICATIONS

| (E) Electrical Connection: | VAC400-3N 50/60Hz |
|----------------------------|-------------------|
| (AF) Cold Water Inlet:     | Ø3/4-H=IOOmm.     |
| (S) Output Drain:          | ØI''              |



The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice. LAST UPDATE: 16/1/2025