

RANGE	CODE	MODEL	FUNCTION
MI - 90	MAMCOOO3660	IFR94E22KA	i-Fry

ITEM

Single pan electric fryer 22 litres with electronic controls and basket lifting



The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice.



RANGE	CODE	MODEL	FUNCTION
MI - 90	MAMCOOO3660	IFR94E22KA	i-Fry

ITEM

Single pan electric fryer 22 litres with electronic controls and basket lifting



TECHNICAL SPECIFICATIONS

WIDTH (mm):		400	
DEPTH (mm):		920	
HEIGHT (mm):		900	
WEIGHT (Kg):		58	
VOLUME (m ³):		0.6	
EL. POWER (kW):		22	
VOLTAGE:		VAC400-3N	
COOKING ZONES N°:		1	
COOKING ZONE DETAILS:		1x 22kW	
TANK N°:	1	CAPACITY (L):	23
IP GRADE:		IPX5	
TEMP. RANGE (°C):		0-180	

DESCRIPTION

Freestanding electric fryer on cabinet base with electronic temperature control, high productivity, in AISI 3O4 stainless steel. 20/IO gauge flush alignment top without flue apertures. Pressed AISI 3O4 stainless steel cooking tank, with radiused internal profile. Tank capacity 22 litres. Tanks with wide front expansion zone for oil and foam and extended cold zone for collection of food particles. Heating by means of a sheathed immersion-type heating element in AISI 3O4 stainless steel. The element can be rotated by over 90° using a special lifting hook to facilitate tank cleaning. Output modulation to optimise heating and efficiency. Melting cycle. Automatic cooking function to guarantee high quality fried products. The operator select one of the 3O available programs to choose the type, quantity, and storage temperature of the product to be fried. The electronic system automatically adapts the cooking cycle, making the necessary compensation according to the selection made. Control panel with 7-inch high-resolution Touch Screen with electronic control board for management of cooking temperature from O to 185°C with accuracy of ± 1°C, HACCP alarms, tank cleaning cycle, preheating function, maintenance at IOO°C, and system diagnostics. Manual reset safety thermostat. System for automatic and programmable lifting for cooking with two I/2 baskets. Composed of 2 straight actuators for I2O mm lift and with cooking end audible signal. Equipped with: I tank bottom filter; I chromed steel mesh to support cooking baskets; 2 chromed steel cooking baskets, size I/2, with front handle in heatproof material; I tank lid; I extension for frontal drainage of tank. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.




The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice. LAST UPDATE: 16/1/2025



MI - 90	MAMCOOO3660	IFR94E22KA	i-Fry
RANGE	CODE	MODEL	FUNCTION

ITEM

Single pan electric fryer 22 litres with electronic controls and basket lifting

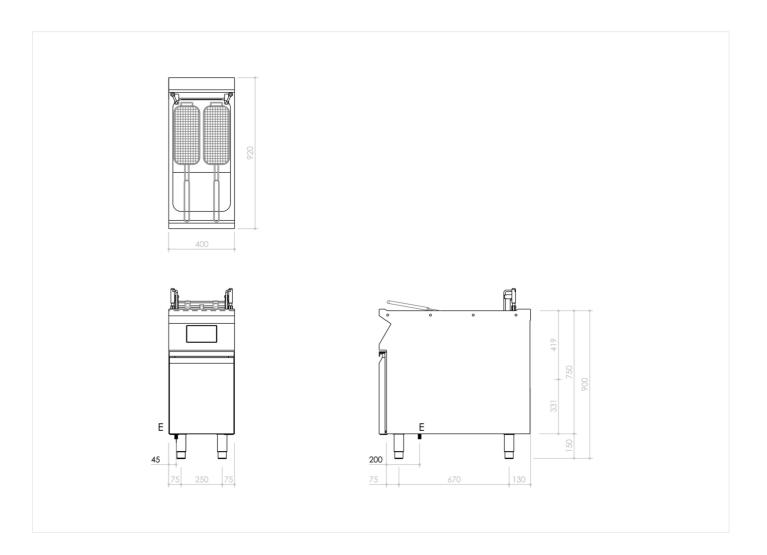

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:

VAC400-3N 50/60Hz



The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice. LAST UPDATE: 16/1/2025