

RANGE CODE

MODEL

FUNCTION


MI - 90 MAMCOOO4060

FT94GRT#

Griddles - Mild Steel Plate

ITEM

Gas griddle top with ribbed plate

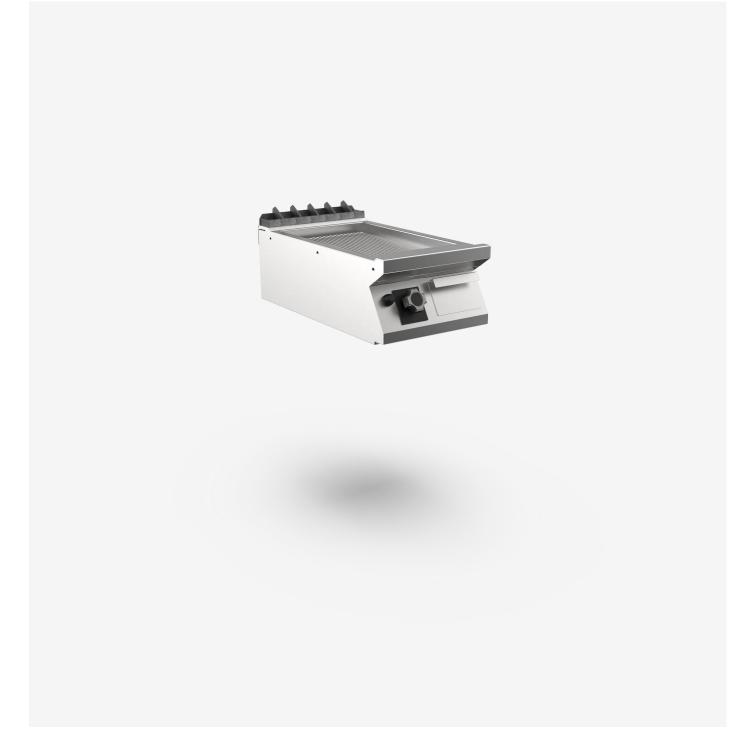



RANGE CODE MODEL FUNCTION

MI - 90 MAMCOOO4060 FT94GRT# Griddles - Mild Steel Plate

ITEM

Gas griddle top with ribbed plate



TECHNICAL SPECIFICATIONS

WIDTH (mm):	400
DEPTH (mm):	920
HEIGHT (mm):	250
WEIGHT (Kg):	61
VOLUME (m ³):	O.25
GAS POWER (kW):	7
COOKING ZONES N°:	1
COOKING ZONES DIM. (mm):	335x7OOmm
COOKING ZONE DETAILS:	1x 10.50
PRODUCT SPECIFICATIONS:	Ribbed Mild Steel Plate
TEMP. RANGE (°C):	90-280

DESCRIPTION

Gas griddle in AISI 3O4 stainless steel. 2O/IO pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. Cooking surface with sloping ribbed hotplate. Hotplate recessed 4O mm compared to worktop, fully welded construction for guaranteed ease of cleaning. Cooking surface with 65 mm cold zone at front of hotplate. Round Ø 4O mm drain hole for fat. Grease collection tub with I.5 litre capacity. Heating by means of steel stabilised flame burner having 2 branches and 4 rows of flames for each zone, complete with pilot flame and safety thermocouple. Heating control knob shaped to prevent water infiltration. Gas supply controlled by thermostatic valve with safety thermocouple. Cooking temperature manually controlled from 90°C to 280°C. Automatic ignition by means of piezoelectric device with waterproof cap. Cooking surface 335x700 mm. Scraper supplied for smooth hotplate.





RANGE CODE

MODEL

FUNCTION

MI - 90


MAMC0004060

FT94GRT#

Griddles - Mild Steel Plate

ITEM

Gas griddle top with ribbed plate

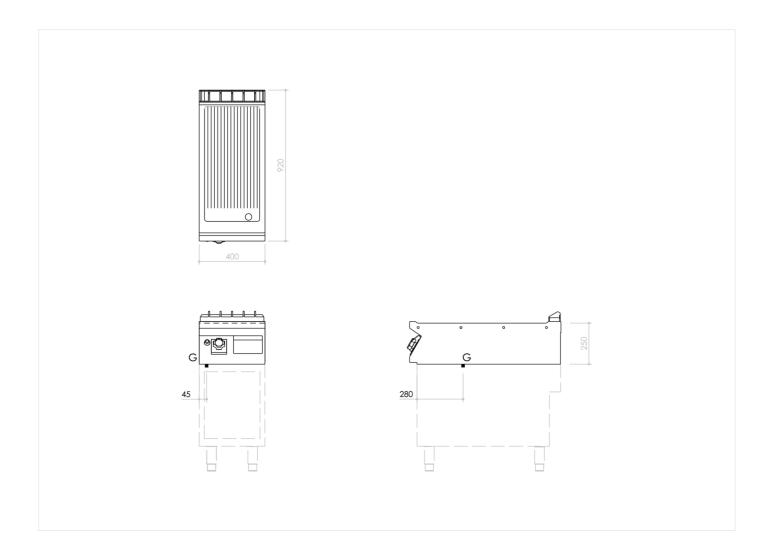

INSTALLATION SPECIFICATIONS

(G) Gas Inlet: Ø1/2"

