

RANGE	CODE	MODEL	FUNCTION
MI - IIO	CRI3O587O	NVIOFE9E	Glassceramic Ranges

ITEM

Pass through 4 ceramic hotplate electric boiling top electric oven range



RANGE	CODE	MODEL	FUNCTION
MI - 110	CRI305870	NVIOFE9E	Glassceramic Ranges

ITEM

Pass through 4 ceramic hotplate electric boiling top electric oven range



TECHNICAL SPECIFICATIONS

WIDTH (mm):	900
DEPTH (mm):	1100
HEIGHT (mm):	870
WEIGHT (Kg):	187
VOLUME (m ³):	0.99
EL. POWER (kW):	25
VOLTAGE:	VAC400 3N
INTERNAL OVEN DIM. (mm):	539x1018x254h
OVEN CAPACITY:	6x GNI/1
OVEN POWER (kW):	9 kW
COOKING ZONES N°:	4
COOKING ZONES DIM. (mm):	750x700
IP GRADE:	IPX5
OVEN TEMP. RANGE (°C):	0-280

DESCRIPTION


Pass-through, floor standing electric cooker with a glass ceramic worktop and pass-through electric oven, made of AISI 304 stainless steel. Top with a 20/10 thickness, set-up for a head joint. Equipped with 4 separate cooking areas, each one with radiating elements of 4 kW and controlled by a power regulator. 6 mm glass ceramic hob, hermetically sealed to the worktop. Maximum temperature 400 °C in 3 minutes. Dimensions of the plate are 750x700 mm. Hot areas are closed by screen printing on the glass and equipped with indication lamps for residual heat. Indicator lamps verify that the appliance functions properly. Pass-through electric oven made of stainless steel. Extractable oven sole made of cast iron. Heating occurs by means of upper and lower heating elements that can be adjusted separately by a selector and a single thermostat for temperature control from 50°C to 330°C. A safety thermostat protects against possible overheating. Indicator lamps verify that the oven functions properly. Dimensions of the cooking chamber: 539x1018x254h mm. Oven power 9 kW. Appliance has height adjustable feet made of stainless steel. 2 chrome steel grilles are supplied.



RANGE	CODE	MODEL	FUNCTION
MI - IIO	CRI3O587O	NVIOFE9E	Glassceramic Ranges

ITEM

Pass through 4 ceramic hotplate electric boiling top electric oven range

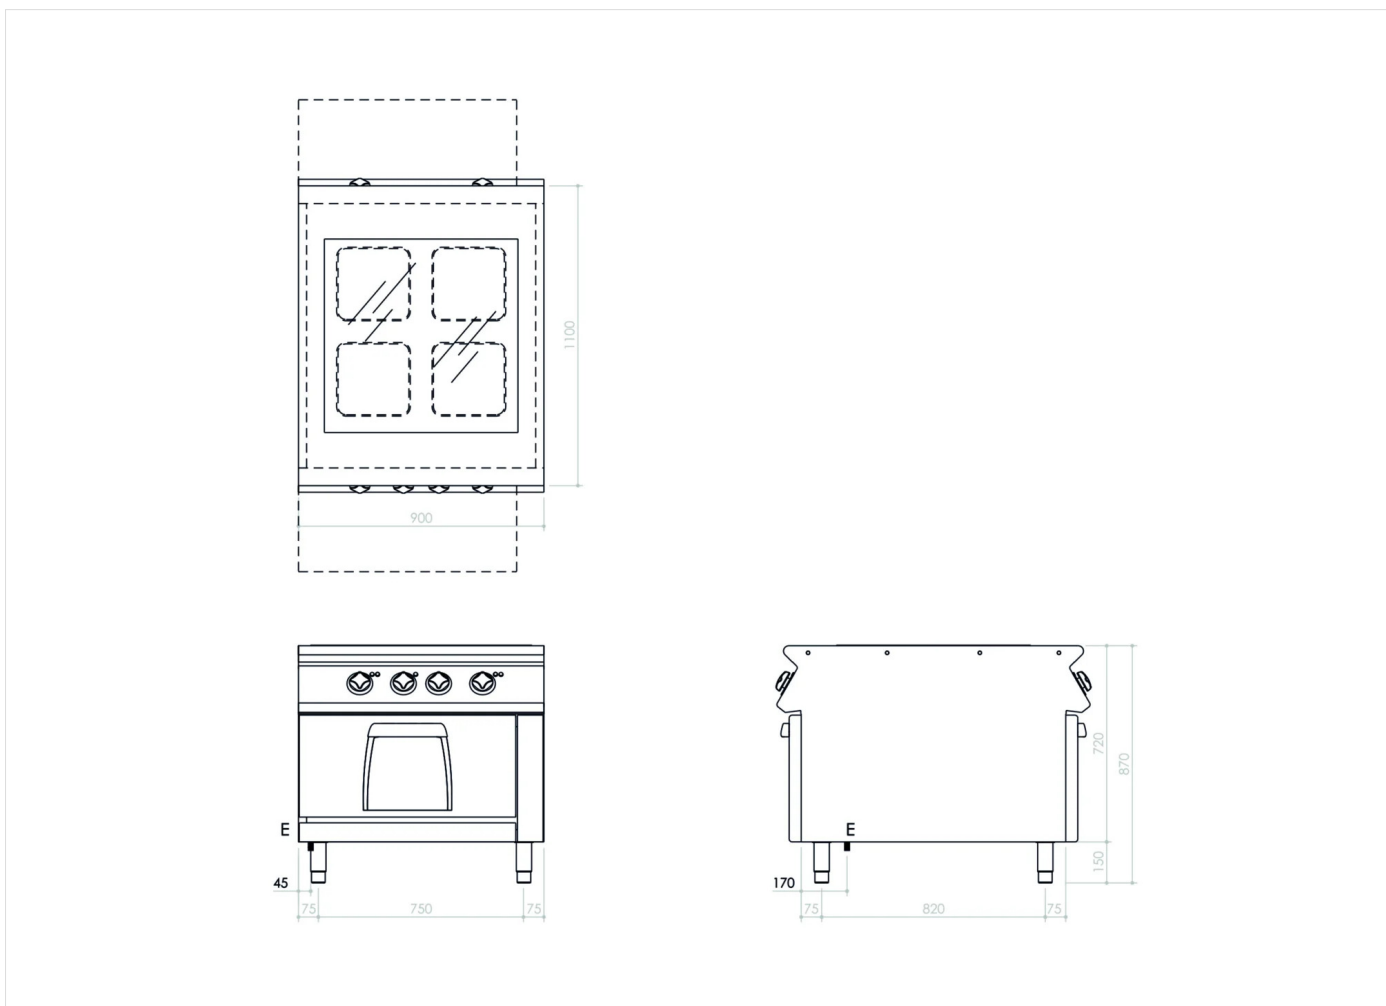

INSTALLATION SPECIFICATIONS

(E) Electrical Connection: **VAC400 3N 50Hz**

