

RANGE	CODE MAMCOOOO450	MODEL CV78EFE	FUNCTION Glassceramic Ranges
MI - 70			

ITEM

4 ceramic electric hotplate static electric oven range



The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice.



RANGECODEMODELFUNCTIONMI - 70MAMCOOOO450CV78EFEGlassceramic Ranges

ITEM

4 ceramic electric hotplate static electric oven range



TECHNICAL SPECIFICATIONS

WIDTH (mm):	800	
DEPTH (mm):	750	
HEIGHT (mm):	900	
WEIGHT (Kg):	106	
VOLUME (m ³):	O.8	
EL. POWER (kW):	16	
VOLTAGE:	VAC400-3N	
INTERNAL OVEN DIM. (mm):	575x654x300h mm	
OVEN CAPACITY:	3x GN 2/1	
OVEN POWER (kW):	6	
COOKING ZONES N°:	4	
COOKING ZONES DIM. (mm):	4x Ø 250mm	
COOKING ZONE DETAILS:	4 x 2,5 kW	
IP GRADE:	IPX5	
OVEN TEMP. RANGE (°C):	0-280	

DESCRIPTION

Freestanding glass ceramic electric boiling top, on static electric oven, in AISI 3O4 stainless steel. 20/IO pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. 6 mm thick glass ceramic cooking surface hermetically sealed to the top and designed to create 4 independent cooking zones, each with underlying 2.5 kW Ø 250 mm radiant elements to reach maximum temperature of 400°C in 3 min. Glass dimensions 746x571 mm. The cooking zones are marked by screen printed circles on the glass-ceramic surface and equipped with residual heat indicators. Energy regulator for heat control with shape designed to prevent water infiltration, with integral indicator lights for instant recognition of appliance operation. Hotplates equipped with automatic reset safety thermostat that trips if the appliance is switched on with an unsuitable pan or no pan at all. GN 2/I conventional electric oven. Oven heated by independently controlled top and bottom heating elements. Thermostat control providing temperature adjustment from IIO°C to 280°C. Stainless steel oven chamber, dimensions 575x654x300h mm. Heavy gauge enamelled steel oven bottom. Oven inner door in stainless steel with labyrinth seal. 4-position selector switch, safety thermostat. Indicator lights indicating correct oven operation. Oven power 6 kW. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.

MARENO ALI Group Srl Società a Socio Unico: Via Conti Agosti , 231 - 31010 Mareno di Piave (TV) Capitale Sociale 50.000.000,00 i.v.


The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice.



MI - 70	MAMC0000450	CV78EFE	Glassceramic Ranges
RANGE	CODE	MODEL	FUNCTION

ITEM

4 ceramic electric hotplate static electric oven range

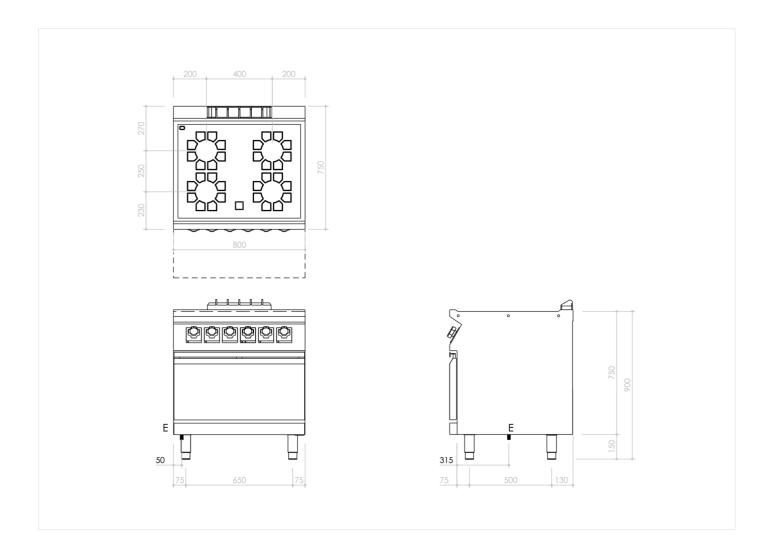

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:

VAC400-3N 50/60Hz



The data reported in this document is to be considered nonbinding. The company reserves the right to make changes at any time, without prior notice.