

RANGE	CODE	MODEL	FUNCTION
MI - 90	MAMCOOO4050	FT94GLG#	Griddles - Mild Steel Plate

ITEM

Gas griddle top with smooth plate on open stand



RANGE	CODE	MODEL	FUNCTION
MI - 90	MAMCOOO4050	FT94GLG#	Griddles - Mild Steel Plate

ITEM

**Gas griddle top with smooth plate on open stand**



**TECHNICAL SPECIFICATIONS**

WIDTH (mm):	400
DEPTH (mm):	920
HEIGHT (mm):	900
WEIGHT (Kg):	76
VOLUME (m <sup>3</sup> ):	0.5
GAS POWER (kW):	7
INTERNAL BASE UNIT DIM. (mm):	360x400(h)x900 mm
COOKING ZONES N°:	1
COOKING ZONES DIM. (mm):	335x700mm
COOKING ZONE DETAILS:	1x 10.50
PRODUCT SPECIFICATIONS:	Smooth Mild Steel Plate
TEMP. RANGE (°C):	90-280

**DESCRIPTION**


Freestanding electric griddle on open cabinet base, in AISI 304 stainless steel. 20/10 pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied. Top designed to accommodate water column accessory. Cooking surface with sloping smooth hotplate. Hotplate recessed 40 mm compared to worktop, fully welded construction for guaranteed ease of cleaning. Cooking surface with 65 mm cold zone at front of hotplate. Round Ø 40 mm drain hole for fat. Grease collection tub with 1.5 litre capacity. Heating by means of steel stabilised flame burner having 2 branches and 4 rows of flames for each zone, complete with pilot flame and safety thermocouple. Heating control knob shaped to prevent water infiltration. Gas supply controlled by thermostatic valve with safety thermocouple. Cooking temperature manually controlled from 90°C to 280°C. Automatic ignition by means of piezoelectric device with waterproof cap. Cooking surface 335x700 mm. Scraper supplied for smooth hotplate. Appliance equipped with stainless steel adjustable feet.



RANGE	CODE	MODEL	FUNCTION
MI - 90	MAMCOOO4O5O	FT94GLG#	Griddles - Mild Steel Plate

ITEM

Gas griddle top with smooth plate on open stand

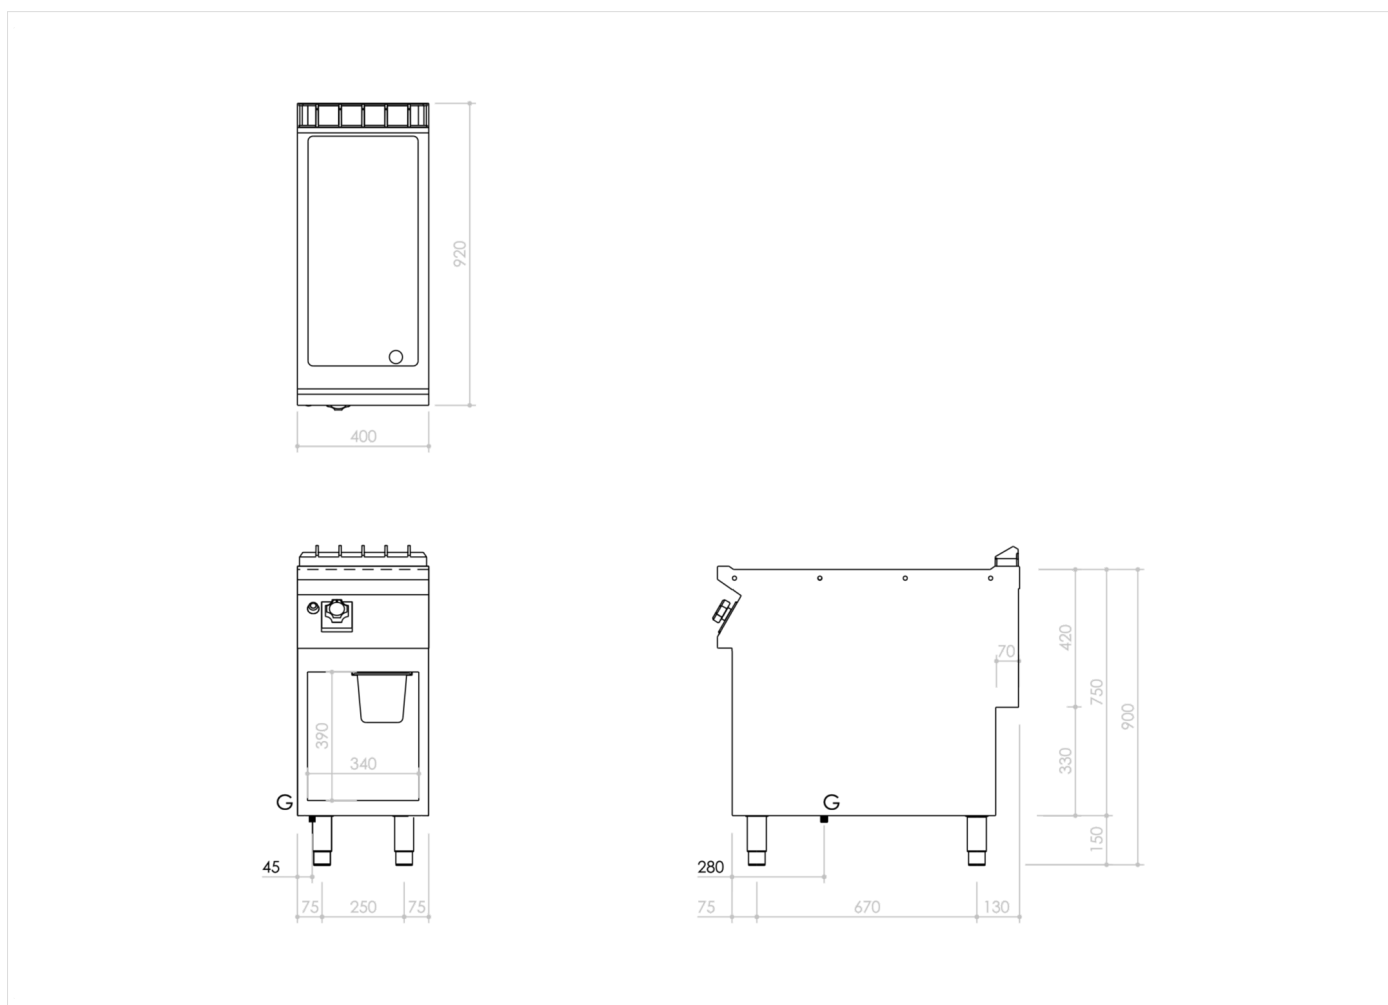

INSTALLATION SPECIFICATIONS

(G) Gas Inlet:  $\text{Ø}1/2''$

